

## Single Stage Fabmaster Regulator 2 Gauge Argon 10 Bar – HL050011-10Bar

### Key Features:


- 1 years warranty.
- 300 bar service.
- Available in bottom & side entry.
- High contrast, easy to read gauges.
- Alloy bonnet for high strength.
- Manufactured under BS EN ISO 9001.
- Conforms to BS EN ISO 2503



### Technical Data:

| Specification                 |               |
|-------------------------------|---------------|
| Inlet Connection Arrangement  | 6 O'clock     |
| Inlet Connection Length       | 70mm          |
| Inlet Connection Size         | BS341 No3     |
| Outlet Connection Arrangement | 4 O'clock     |
| Outlet Connection Size        | G3/8 RH       |
| Relief Valve Arrangement      | 9 O'clock     |
| Inlet Pressure                | 230 bar       |
| Outlet Pressure setting       | 10 Bar        |
| Weight                        |               |
| Material                      |               |
| Body                          | Brass         |
| Bonnet                        | Zinc Alloy    |
| Piston                        |               |
| Seal                          |               |
| Valve Seat                    | Modified PTFE |
| Filter                        |               |

### Flow Data:

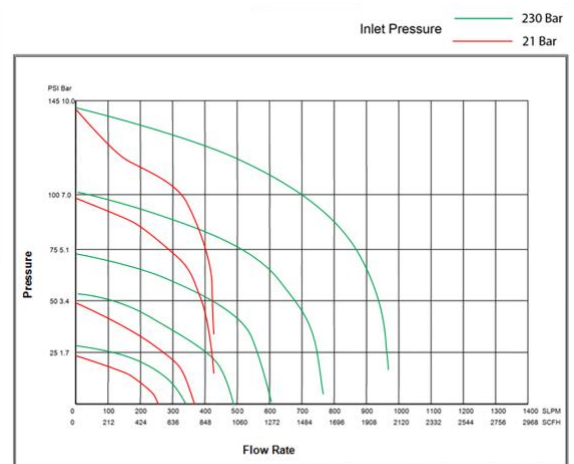

\*FLOW TAKEN UNDER STANDARD WORKING TEMPERATURE OF 25°C ± 1.5°C USING OIL FREE BREATHABLE COMPRESSED AIR, WITH DIGITAL FLOW DEVICE (SERIAL NO.80763) CALIBRATED TO FULL SCALE PRESSURE 160PSIA WITH AN ACCURACY OF ± 0.5% OF FULL SCALE PRESSURE.